

RECESSED INDOOR PROFILE

Architape A008 Indoor Luminaire Series

24VDC / 48VDC

IP20

MACADAM 3-STEP

5-YEAR WARRANTY

HIGH EFFICACY NICHIA

A008 is a small size recess-mount fixture perfect for dotless decorative linear lighting.

POWER RANGE

1.2 W/m – 18.2 W/m

LUMINOUS FLUX

31 lm/m – 2,765 lm/m

DIMENSIONS (W X H)

16.2 x 22.2 mm

SERVICE LIFETIME

L90B10 > 60kh



ARCHITAPE INDOOR LUMINAIRE SERIES

TESTED & CERTIFIED UNDER INTERNATIONAL STANDARDS




SCAN TO VIEW SERIES ONLINE

ENGINEERING, OPTICS & DIMENSIONS

ARCHITAPE A008 INDOOR LUMINAIRE SERIES

PHOTOMETRIC DISTRIBUTION

120°

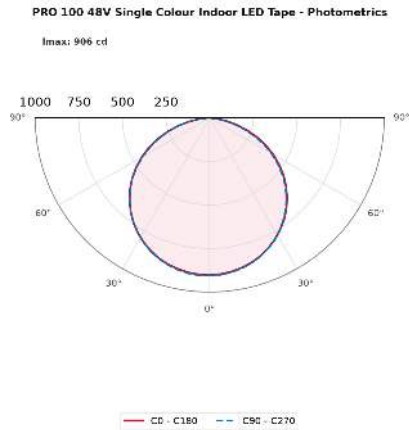

Precision optical distribution engineered for homogeneous illumination, minimal glare, and superior exterior facade grazing and accent lighting.

ELECTRICAL & SYSTEM SPECS


OPERATING VOLTAGE	24VDC / 48VDC (Constant Voltage)
AVAILABLE WATTAGES	1.2 W/m – 18.2 W/m
COLOR CONSISTENCY	MacAdam 3-Step Ellipse (SDCM ≤ 3)
DIMMING PROTOCOLS	PWM, 0-10V, DALI-2 (DT6/DT8), Casambi
OPERATING TEMP	-25°C to +50°C
MAX CASE TEMP (TC)	Tc max 75°C
WARRANTY	5-Year System Guarantee
LED EMITTERS	Nichia High-Efficiency LEDs

SPECTRAL & FINISH OPTIONS

AVAILABLE CCT	1400K, 1600K, 1800K, 2000K, 2200K, 2500K, 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K, 7000K, 8000K, RGB, RGBW
COLOUR FIDELITY	CRI 80, CRI 90, CRI 95
OPTICAL COVERS	Clear, Opal, Opal homogeneous
HOUSING COLOURS	Grey, White

DIMENSIONS & PROFILE SECTION

SECTION: 16.2 X 22.2 MM

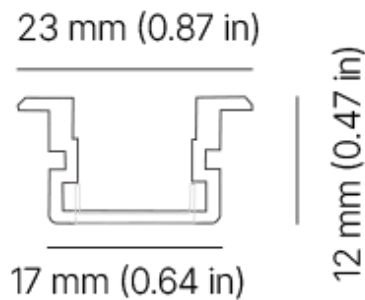

OUTER DIMENSIONS	16.2 x 22.2 mm
INGRESS PROTECTION	IP20
PROFILE MATERIAL	Extruded aluminium profile · Recessed horizontal mounting / Recessed vertical mounting / Wall mounting
ENCAPSULATION / COVER	Clear, Opal, Opal homogeneous

PART NUMBER DECODING LOGIC

[RANGE] - [TAPE] - [VOLTAGE] - [POWER] - [COLOUR] - [PROFILE] - [FINISH] - [COVER] - [EXIT] - [CABLE] - [LENGTH]

Example: AL-100-48-5-027-A008-GY-OPA-LEC-0M2-1010

• A008: profile • Grey finish • Opal cover • PRO 100 48V Single Colour Indoor LED Tape • 2700K • 1010 mm

INSTALLATION & CUSTOM LENGTHS

STANDARD LENGTHS	1010 mm standard · 12 tape options: PRO 100 48V Single Colour, PRO 100 RGB, PRO 100 Single Colour, PRO 100 TW, PRO 112S Single Colour, PRO 175 Single Colour, PRO 20 Single Colour, PRO 50 RGB, PRO 50 RGBW, PRO 50 Single Colour, PRO 50 TW, PRO 70 TW
CUSTOM CUTTING	Factory custom lengths down to segment pitch
CABLE ENTRY / EXITS	Side, Back, or End exit with IP67 connectors
DRIVER TYPE	Independent Class II SELV 24V / 48V

ARCHITAPE A008 INDOOR LUMINAIRE SERIES – STANDARD MODEL DIRECTORY

PAGE 3 OF
4

PART CODE	COVER	BEAM	POWER	CCT / COLOUR	CRI	FLUX	FINISH	DATASHEET
AL-100-48-5-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-48-5-030-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-48-5-030-A008-GY-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-48-5-030-A008-WH-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-48-5-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-48-5-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-48-10-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	9.6 W/m	3000K	CRI 95	994 lm	Grey	PDF ↗
AL-100-24-12-RGB-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	11.5 W/m	RGB	—	479 lm	Grey	PDF ↗
AL-100-24-12-RGB-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	11.5 W/m	RGB	—	479 lm	White	PDF ↗
AL-100-24-12-RGB-A008-GY-CLR-LEC-0M2-1010	Clear	120Å°	11.5 W/m	RGB	—	479 lm	Grey	PDF ↗
AL-100-24-12-RGB-A008-WH-CLR-LEC-0M2-1010	Clear	120Å°	11.5 W/m	RGB	—	479 lm	White	PDF ↗
AL-100-24-12-RGB-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	11.5 W/m	RGB	—	479 lm	Grey	PDF ↗
AL-100-24-12-RGB-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	11.5 W/m	RGB	—	479 lm	White	PDF ↗
AL-100-24-14-RGB-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	14.4 W/m	RGB	—	600 lm	Grey	PDF ↗
AL-100-24-5-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-24-5-030-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-24-5-030-A008-GY-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-24-5-030-A008-WH-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-24-5-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-100-24-5-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-100-24-10-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	9.6 W/m	3000K	CRI 95	994 lm	Grey	PDF ↗
AL-100-24-10-82765-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	Grey	PDF ↗
AL-100-24-10-82765-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	White	PDF ↗
AL-100-24-10-82765-A008-GY-CLR-LEC-0M2-1010	Clear	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	Grey	PDF ↗
AL-100-24-10-82765-A008-WH-CLR-LEC-0M2-1010	Clear	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	White	PDF ↗
AL-100-24-10-82765-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	Grey	PDF ↗
AL-100-24-10-82765-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	9.6 W/m	2700-6500K	CRI 80	1,343 lm	White	PDF ↗
AL-112-24-5-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-112-24-5-030-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-112-24-5-030-A008-GY-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-112-24-5-030-A008-WH-CLR-LEC-0M2-1010	Clear	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-112-24-5-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	Grey	PDF ↗
AL-112-24-5-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120Å°	4.8 W/m	3000K	CRI 95	501 lm	White	PDF ↗
AL-112-24-10-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	9.6 W/m	3000K	CRI 95	994 lm	Grey	PDF ↗
AL-175-24-5-030-A008-GY-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	502 lm	Grey	PDF ↗
AL-175-24-5-030-A008-WH-OPA-LEC-0M2-1010	Opal	120Å°	4.8 W/m	3000K	CRI 95	502 lm	White	PDF ↗

ARCHITAPE INDOOR LUMINAIRE SERIES

ARCHITAPE A008 INDOOR LUMINAIRE SERIES – STANDARD MODEL DIRECTORY

PAGE 4 OF 4

PART CODE	COVER	BEAM	POWER	CCT / COLOUR	CRI	FLUX	FINISH	DATASHEET
AL-175-24-5-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	4.8 W/m	3000K	CRI 95	502 lm	Grey	PDF
AL-175-24-5-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	4.8 W/m	3000K	CRI 95	502 lm	White	PDF
AL-20-24-1-030-A008-GY-OPA-LEC-0M2-1010	Opal	120°	1.2 W/m	3000K	CRI 95	125 lm	Grey	PDF
AL-20-24-1-030-A008-WH-OPA-LEC-0M2-1010	Opal	120°	1.2 W/m	3000K	CRI 95	125 lm	White	PDF
AL-20-24-1-030-A008-GY-CLR-LEC-0M2-1010	Clear	120°	1.2 W/m	3000K	CRI 95	125 lm	Grey	PDF
AL-20-24-1-030-A008-WH-CLR-LEC-0M2-1010	Clear	120°	1.2 W/m	3000K	CRI 95	125 lm	White	PDF
AL-20-24-1-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	1.2 W/m	3000K	CRI 95	125 lm	Grey	PDF
AL-20-24-1-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	1.2 W/m	3000K	CRI 95	125 lm	White	PDF
AL-50-24-7-RGB-A008-GY-OPA-LEC-0M2-1010	Opal	120°	7.2 W/m	RGB	—	316 lm	Grey	PDF
AL-50-24-7-RGB-A008-WH-OPA-LEC-0M2-1010	Opal	120°	7.2 W/m	RGB	—	316 lm	White	PDF
AL-50-24-7-RGB-A008-GY-CLR-LEC-0M2-1010	Clear	120°	7.2 W/m	RGB	—	316 lm	Grey	PDF
AL-50-24-7-RGB-A008-WH-CLR-LEC-0M2-1010	Clear	120°	7.2 W/m	RGB	—	316 lm	White	PDF
AL-50-24-7-RGB-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	7.2 W/m	RGB	—	316 lm	Grey	PDF
AL-50-24-7-RGB-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	7.2 W/m	RGB	—	316 lm	White	PDF
AL-50-24-10-RGBW027-A008-GY-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	RGBW-2700K	—	526 lm	Grey	PDF
AL-50-24-10-RGBW027-A008-WH-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	RGBW-2700K	—	526 lm	White	PDF
AL-50-24-10-RGBW027-A008-GY-CLR-LEC-0M2-1010	Clear	120°	9.6 W/m	RGBW-2700K	—	526 lm	Grey	PDF
AL-50-24-10-RGBW027-A008-WH-CLR-LEC-0M2-1010	Clear	120°	9.6 W/m	RGBW-2700K	—	526 lm	White	PDF
AL-50-24-10-RGBW027-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	9.6 W/m	RGBW-2700K	—	526 lm	Grey	PDF
AL-50-24-10-RGBW027-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	9.6 W/m	RGBW-2700K	—	526 lm	White	PDF
AL-50-24-2-030-A008-GY-OPA-LEC-0M2-1010	Opal	120°	2.4 W/m	3000K	CRI 95	250 lm	Grey	PDF
AL-50-24-2-030-A008-WH-OPA-LEC-0M2-1010	Opal	120°	2.4 W/m	3000K	CRI 95	250 lm	White	PDF
AL-50-24-2-030-A008-GY-CLR-LEC-0M2-1010	Clear	120°	2.4 W/m	3000K	CRI 95	250 lm	Grey	PDF
AL-50-24-2-030-A008-WH-CLR-LEC-0M2-1010	Clear	120°	2.4 W/m	3000K	CRI 95	250 lm	White	PDF
AL-50-24-2-030-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	2.4 W/m	3000K	CRI 95	250 lm	Grey	PDF
AL-50-24-2-030-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	2.4 W/m	3000K	CRI 95	250 lm	White	PDF
AL-50-24-10-03035-A008-GY-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	Grey	PDF
AL-50-24-10-03035-A008-WH-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	White	PDF
AL-50-24-10-03035-A008-GY-CLR-LEC-0M2-1010	Clear	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	Grey	PDF
AL-50-24-10-03035-A008-WH-CLR-LEC-0M2-1010	Clear	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	White	PDF
AL-50-24-10-03035-A008-GY-OPH-LEC-0M2-1010	Opal homogeneous	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	Grey	PDF
AL-50-24-10-03035-A008-WH-OPH-LEC-0M2-1010	Opal homogeneous	120°	9.6 W/m	3000K-3500K	CRI 95	1,004 lm	White	PDF
AL-70-24-10-03035-A008-GY-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	3000K-3500K	CRI 95	1,008 lm	Grey	PDF
AL-70-24-10-03035-A008-WH-OPA-LEC-0M2-1010	Opal	120°	9.6 W/m	3000K-3500K	CRI 95	1,008 lm	White	PDF

ARCHITAPE INDOOR LUMINAIRE SERIES