HEAVY-DUTY EXTERIOR LINEAR PROFILE LUMINAIRE

Architape H-Line L Outdoor Series

24VDC / 48VDC | OUTDOOR IP67 | MACADAM 3-STEP | 5-YEAR WARRANTY | HIGH EFFICACY NICHIA

Architape H-Line L is a robust 34x56mm exterior luminaire engineered for demanding building exterior grazing, long projection washes, and extreme weather exposure with lumen deliveries up to 1,970 lm/m.

POWER RANGE	LUMINOUS FLUX	DIMENSIONS (W X H)	SERVICE LIFETIME
1.2 W/m – 24.0 W/m	10 lm/m – 1,970 lm/m	34 x 56 mm	L90B10 > 60kh



ARCHITAPE OUTDOOR LUMINAIRE SERIES

TESTED & CERTIFIED UNDER INTERNATIONAL STANDARDS

UKCA CE ETL MADE IN EUROPE 5 YEAR WARRANTY


SCAN TO VIEW SERIES ONLINE

ENGINEERING, OPTICS & DIMENSIONS

ARCHITAPE H-LINE L OUTDOOR SERIES

PHOTOMETRIC DISTRIBUTION


120Â° BEAM ANGLE

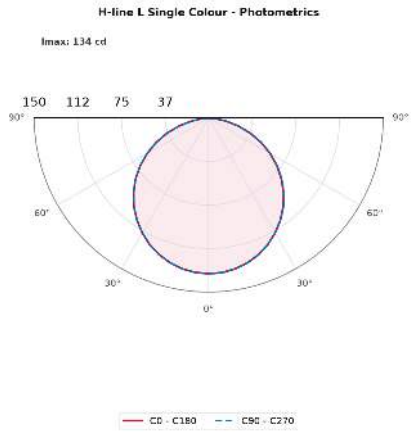

Precision optical distribution engineered for homogeneous illumination, minimal glare, and superior exterior facade grazing and accent lighting.

DIMENSIONS & PROFILE SECTION

SECTION: 34 X 56 MM



OUTER DIMENSIONS	34 x 56 mm
INGRESS PROTECTION	Outdoor IP67
PROFILE MATERIAL	Heavy Architectural Aluminium 6063-T6 & Resin Potting
ENCAPSULATION / COVER	Opal Encapsulated, Opal Encapsulated, Hard

ELECTRICAL & SYSTEM SPECS

OPERATING VOLTAGE	24VDC / 48VDC (Constant Voltage)
AVAILABLE WATTAGES	1.2 W/m – 24.0 W/m
COLOR CONSISTENCY	MacAdam 3-Step Ellipse (SDCM ≤ 3)
DIMMING PROTOCOLS	PWM, 0-10V, DALI-2 (DT6/DT8), Casambi
OPERATING TEMP	-25°C to +50°C
MAX CASE TEMP (TC)	Tc max 75°C
WARRANTY	5-Year System Guarantee
LED EMITTERS	Nichia High-Efficiency LEDs

SPECTRAL & FINISH OPTIONS

AVAILABLE CCT	2200K, 2500K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K, RGB
COLOUR FIDELITY	CRI 80+, CRI 90+
OPTICAL COVERS	Opal Encapsulated, Opal Encapsulated, Hard
HOUSING COLOURS	Black, Gray, White

PART NUMBER DECODING LOGIC

```
[SERIES] [PROFILE] [SEGMENT] [FINISH] [COVER] / [LED STRIP] [GEN] [POWER] [CCT] [LENGTH]
```

Example: `FXI.UlaL67.A1112 FB_ PBK EOP / FL112/Nx G5 10W 930 L1000 / HR.P1X.L200/L1000`

• UlaL67: H-Line L 34x56mm • PBK: Powder Black • EOP: Opal Encapsulation • FL112: 112 LEDs/m • 930: 3000K CRI90+

INSTALLATION & CUSTOM LENGTHS

STANDARD LENGTHS	1000 mm
CUSTOM CUTTING	Factory custom lengths down to segment pitch
CABLE ENTRY / EXITS	Side, Back, or End exit with IP67 connectors
DRIVER TYPE	Independent Class II SELV 24V / 48V

ARCHITAPE OUTDOOR LUMINAIRE SERIES

ARCHITAPE H-LINE L OUTDOOR SERIES — STANDARD MODEL DIRECTORY

PART CODE	COVER	BEAM	POWER	CCT / COLOUR	CRI	FLUX	FINISH	DATASHEET
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 04W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	4.8 W/m	2700K	CRI90	231 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 04W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	4.8 W/m	3000K	CRI90	243 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 04W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	4.8 W/m	4000K	CRI90	253 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 09W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K	CRI90	459 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 09W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	3000K	CRI90	482 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 09W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K	CRI90	501 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 14W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	14.4 W/m	2700K	CRI90	681 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 14W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	14.4 W/m	3000K	CRI90	716 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 14W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	14.4 W/m	4000K	CRI90	745 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 19W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K	CRI90	901 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 19W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K	CRI90	946 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 19W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K	CRI90	984 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 24W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	24.0 W/m	2700K	CRI90	1,116 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 24W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	24.0 W/m	3000K	CRI90	1,172 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL112/Nx G5 24W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	24.0 W/m	4000K	CRI90	1,219 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 01W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	1.2 W/m	2700K	CRI90	58 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 01W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	1.2 W/m	3000K	CRI90	61 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 01W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	1.2 W/m	4000K	CRI90	63 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 02W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	2.4 W/m	2700K	CRI90	115 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 02W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	2.4 W/m	3000K	CRI90	120 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 02W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	2.4 W/m	4000K	CRI90	125 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 09W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.1 W/m	2700K	CRI90	414 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 09W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.1 W/m	3000K	CRI90	435 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL28/Nx G4 09W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.1 W/m	4000K	CRI90	452 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL56/Nx G5 18W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	18.2 W/m	2700K	CRI90	829 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL56/Nx G5 18W T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	18.2 W/m	3000K	CRI90	871 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/FL56/Nx G5 18W T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	18.2 W/m	4000K	CRI90	905 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T927T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K / 3000K	CRI90	470 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T927T935 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K / 3500K	CRI90	476 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T927T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K / 4000K	CRI90	480 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T927T950 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K / 5000K	CRI90	481 lm	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T927T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700K / 5700K	CRI90	472 lm	Black	PDF ↗

ARCHITAPE H-LINE L OUTDOOR SERIES — STANDARD MODEL DIRECTORY

PART CODE	COVER	BEAM	POWER	CCT / COLOUR	CRI	FLUX	FINISH	DATASHEET
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T930T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	3000K / 5700K	CRI90	**483 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T930T965 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	3000K / 6500K	CRI90	**483 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T930T970 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	3000K / 7000K	CRI90	**483 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T930T980 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	3000K / 8000K	CRI90	**483 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T940T950 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K / 5000K	CRI90	**502 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T940T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K / 5700K	CRI90	**493 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T940T965 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K / 6500K	CRI90	**493 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T940T970 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K / 7000K	CRI90	**493 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 09W T940T980 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	4000K / 8000K	CRI90	**493 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T930 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 3000K	CRI90	**923 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T935 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 3500K	CRI90	**935 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 4000K	CRI90	**942 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T950 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 5000K	CRI90	**945 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 5700K	CRI90	**927 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T965 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 6500K	CRI90	**927 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T970 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 7000K	CRI90	**927 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T927T980 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700K / 8000K	CRI90	**927 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T935 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 3500K	CRI90	**958 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T940 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 4000K	CRI90	**965 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T950 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 5000K	CRI90	**968 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 5700K	CRI90	**950 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T965 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 6500K	CRI90	**950 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T970 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 7000K	CRI90	**950 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T930T980 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	3000K / 8000K	CRI90	**950 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T940T950 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K / 5000K	CRI90	**987 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T940T957 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K / 5700K	CRI90	**969 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T940T965 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K / 6500K	CRI90	**969 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T940T970 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K / 7000K	CRI90	**969 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TW56/NN G5 19W T940T980 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	4000K / 8000K	CRI90	**969 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TWd112/Nx G4 09W 827-65 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	9.6 W/m	2700-6500K	CRI80	**443 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ PBK EOP/TWd112/Nx G4 19W 827-65 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	19.2 W/m	2700-6500K	CRI80	**879 lm**	Black	PDF ↗
FXI.UlaL67.A1112 FB_ AGY EOP/FL112/Nx G5 04W T927 L1000/HR.P1X.L200/L1000	Opal Encap.	120Â°	4.8 W/m	2700K	CRI90	**273 lm**	Gray	PDF ↗

ARCHITAPE OUTDOOR LUMINAIRE SERIES