

ARCHITECTURAL LINEAR TAPE COLLECTION

Architape Pro 50 Architectural Series

24VDC IP20 MACADAM 3-STEP 5-YEAR WARRANTY CONSTANT VOLTAGE

Architape Pro 50 features high-density emitter spacing engineered for flawless homogeneity even in low-profile diffusers. Available in Single Colour, Dual-Channel Tunable White, RGB, and RGBW with 4-in-1 colour mixing.

POWER RANGE

11.5 W/m – 9.6 W/m

LUMINOUS FLUX

62 lm – 5,071 lm

COLOR FIDELITY

CRI 80+ / 95+

SERVICE LIFETIME

L90B10 > 60kh



ARCHITAPE INDOOR LED TAPE SERIES

TESTED & CERTIFIED UNDER INTERNATIONAL STANDARDS



SCAN TO VIEW SERIES ONLINE

LINEAR ENGINEERING & DIMENSIONS


ARCHITAPE PRO 50 ARCHITECTURAL SERIES

PHOTOMETRIC DISTRIBUTION

120° BEAM SPREAD

PRO 50 Single Colour Indoor LED Tape - Photometrics


Imax: 906 cd

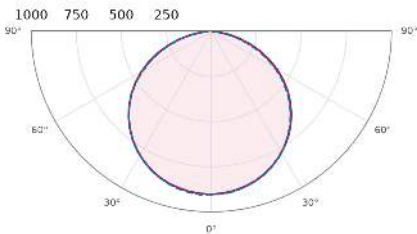

Wide 120° Lambertian distribution delivers uniform, shadow-free illumination across coves, architectural profiles, and indirect surface grazing applications.

DIMENSIONS & CUTTING PITCH

PITCH: 100 MM / 125 MM



PCB WIDTH & HEIGHT	8.0 x 1.62 mm
CUTTING INCREMENT	100 mm / 125 mm
MAX SINGLE RUN	Up to 14 m
ADHESIVE BACKING	3M 300LSE High-Bond Thermal Tape

ELECTRICAL & SYSTEM SPECS

OPERATING VOLTAGE	24VDC (Constant Voltage)
LED DENSITY	56 LEDs/m / High Density
COLOR CONSISTENCY	MacAdam 3-Step Ellipse (SDCM ≤ 3)
DIMMING PROTOCOLS	PWM, 0-10V, DALI-2 (DT6/DT8), Casambi
OPERATING TEMP	-25°C to +50°C
MAX CASE TEMP (TC)	Tc max 75°C
INGRESS PROTECTION	IP20
WARRANTY	5-Year System Guarantee

SPECTRAL & FINISH OPTIONS

AVAILABLE CCT	1400K, 1400K / 1600K, 1400K / 1800K, 1400K / 2000K, 1400K / 2200K, 1400K / 2500K, 1400K / 2700K, 1400K / 3000K, 1400K / 3500K, 1400K / 4000K, 1400K / 5000K, 1400K / 5700K
COLOUR FIDELITY	CRI90, CRI90 / CRI95, CRI95, CRI95 / CRI90, Color, N/A (RGB Spectrum)
COPPER WEIGHT	3oz Double-Sided Heavy Copper PCB
LED PACKAGE	Nichia Architectural Grade Phosphor

PART NUMBER DECODING LOGIC

[FAMILY] [CONFIG] [GEN] [POWER] [CCT1/CCT2]

Example: TW56/NN G5 09W 027/030

• TW56: Pro 50 Tunable White • NN: Nichia Dual Channel • G5: Gen 5 • 09W: 9.6 W/m • 027/030: 2700K & 3000K

MOUNTING & THERMAL REQUIREMENTS

HEAT DISSIPATION	Must mount in aluminium extrusion profile
DRIVER TYPE	Independent Class II SELV 24V / 48V
FEED POINTS	Dual-ended feed recommended for > 10m runs
STANDARD REEL	5 metre reel with 200 mm flying leads

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 3 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
FL56/Nx G5 02W 027	Single Colour	2.4 W/m	2700K	CRI95	245 lm	102 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 030	Single Colour	2.4 W/m	3000K	CRI95	250 lm	104 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 035	Single Colour	2.4 W/m	3500K	CRI95	256 lm	107 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 040	Single Colour	2.4 W/m	4000K	CRI95	259 lm	108 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 914	Single Colour	2.4 W/m	1400K	CRI90	135 lm	56 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 916	Single Colour	2.4 W/m	1600K	CRI90	163 lm	68 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 918	Single Colour	2.4 W/m	1800K	CRI90	200 lm	83 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 920	Single Colour	2.4 W/m	2000K	CRI90	212 lm	88 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 922	Single Colour	2.4 W/m	2200K	CRI90	230 lm	96 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W 925	Single Colour	2.4 W/m	2500K	CRI90	249 lm	104 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T927	Single Colour	2.4 W/m	2700K	CRI90	350 lm	146 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T930	Single Colour	2.4 W/m	3000K	CRI90	368 lm	153 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T935	Single Colour	2.4 W/m	3500K	CRI90	377 lm	157 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T940	Single Colour	2.4 W/m	4000K	CRI90	383 lm	160 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T950	Single Colour	2.4 W/m	5000K	CRI90	384 lm	160 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T957	Single Colour	2.4 W/m	5700K	CRI90	370 lm	154 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T965	Single Colour	2.4 W/m	6500K	CRI90	370 lm	154 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T970	Single Colour	2.4 W/m	7000K	CRI90	370 lm	154 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W T980	Single Colour	2.4 W/m	8000K	CRI90	370 lm	154 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W xBL	Single Colour	2.4 W/m	Blue	Color	62 lm	26 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W xGR	Single Colour	2.4 W/m	Green	Color	84 lm	35 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 02W xRE	Single Colour	2.4 W/m	Red	Color	84 lm	35 Lm/W	125 mm	18.5 m	PDF ↗
FL56/Nx G5 04W 027	Single Colour	4.8 W/m	2700K	CRI95	486 lm	101 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 030	Single Colour	4.8 W/m	3000K	CRI95	497 lm	104 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 035	Single Colour	4.8 W/m	3500K	CRI95	507 lm	106 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 040	Single Colour	4.8 W/m	4000K	CRI95	514 lm	107 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 914	Single Colour	4.8 W/m	1400K	CRI90	269 lm	56 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 916	Single Colour	4.8 W/m	1600K	CRI90	325 lm	68 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 918	Single Colour	4.8 W/m	1800K	CRI90	399 lm	83 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 920	Single Colour	4.8 W/m	2000K	CRI90	420 lm	88 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 922	Single Colour	4.8 W/m	2200K	CRI90	454 lm	95 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W 925	Single Colour	4.8 W/m	2500K	CRI90	493 lm	103 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T927	Single Colour	4.8 W/m	2700K	CRI90	695 lm	145 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T930	Single Colour	4.8 W/m	3000K	CRI90	730 lm	152 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T935	Single Colour	4.8 W/m	3500K	CRI90	748 lm	156 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T940	Single Colour	4.8 W/m	4000K	CRI90	759 lm	158 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T950	Single Colour	4.8 W/m	5000K	CRI90	762 lm	159 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T957	Single Colour	4.8 W/m	5700K	CRI90	735 lm	153 Lm/W	125 mm	13 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 4 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
FL56/Nx G5 04W T965	Single Colour	4.8 W/m	6500K	CRI90	735 lm	153 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T970	Single Colour	4.8 W/m	7000K	CRI90	735 lm	153 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W T980	Single Colour	4.8 W/m	8000K	CRI90	735 lm	153 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W xBL	Single Colour	4.8 W/m	Blue	Color	124 lm	26 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W xGR	Single Colour	4.8 W/m	Green	Color	168 lm	35 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 04W xRE	Single Colour	4.8 W/m	Red	Color	168 lm	35 Lm/W	125 mm	13 m	PDF ↗
FL56/Nx G5 09W 027	Single Colour	9.6 W/m	2700K	CRI95	950 lm	99 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 030	Single Colour	9.6 W/m	3000K	CRI95	971 lm	101 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 035	Single Colour	9.6 W/m	3500K	CRI95	992 lm	103 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 040	Single Colour	9.6 W/m	4000K	CRI95	1004 lm	105 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 914	Single Colour	9.6 W/m	1400K	CRI90	529 lm	55 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 916	Single Colour	9.6 W/m	1600K	CRI90	637 lm	66 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 918	Single Colour	9.6 W/m	1800K	CRI90	783 lm	82 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 920	Single Colour	9.6 W/m	2000K	CRI90	818 lm	85 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 922	Single Colour	9.6 W/m	2200K	CRI90	885 lm	92 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W 925	Single Colour	9.6 W/m	2500K	CRI90	960 lm	100 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T927	Single Colour	9.6 W/m	2700K	CRI90	1364 lm	142 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T930	Single Colour	9.6 W/m	3000K	CRI90	1434 lm	149 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T935	Single Colour	9.6 W/m	3500K	CRI90	1470 lm	153 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T940	Single Colour	9.6 W/m	4000K	CRI90	1491 lm	155 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T950	Single Colour	9.6 W/m	5000K	CRI90	1499 lm	156 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T957	Single Colour	9.6 W/m	5700K	CRI90	1446 lm	151 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T965	Single Colour	9.6 W/m	6500K	CRI90	1446 lm	151 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T970	Single Colour	9.6 W/m	7000K	CRI90	1446 lm	151 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W T980	Single Colour	9.6 W/m	8000K	CRI90	1446 lm	151 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W xBL	Single Colour	9.6 W/m	Blue	Color	246 lm	26 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W xGR	Single Colour	9.6 W/m	Green	Color	337 lm	35 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 09W xRE	Single Colour	9.6 W/m	Red	Color	337 lm	35 Lm/W	125 mm	7.5 m	PDF ↗
FL56/Nx G5 14W 027	Single Colour	14.4 W/m	2700K	CRI95	1388 lm	96 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 030	Single Colour	14.4 W/m	3000K	CRI95	1419 lm	99 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 035	Single Colour	14.4 W/m	3500K	CRI95	1449 lm	101 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 040	Single Colour	14.4 W/m	4000K	CRI95	1468 lm	102 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 914	Single Colour	14.4 W/m	1400K	CRI90	774 lm	54 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 916	Single Colour	14.4 W/m	1600K	CRI90	933 lm	65 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 918	Single Colour	14.4 W/m	1800K	CRI90	1146 lm	80 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 920	Single Colour	14.4 W/m	2000K	CRI90	1196 lm	83 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 922	Single Colour	14.4 W/m	2200K	CRI90	1294 lm	90 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W 925	Single Colour	14.4 W/m	2500K	CRI90	1403 lm	97 Lm/W	125 mm	6 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 5 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
FL56/Nx G5 14W T927	Single Colour	14.4 W/m	2700K	CRI90	2010 lm	140 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T930	Single Colour	14.4 W/m	3000K	CRI90	2112 lm	147 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T935	Single Colour	14.4 W/m	3500K	CRI90	2166 lm	150 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T940	Single Colour	14.4 W/m	4000K	CRI90	2196 lm	153 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T950	Single Colour	14.4 W/m	5000K	CRI90	2211 lm	154 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T957	Single Colour	14.4 W/m	5700K	CRI90	2134 lm	148 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T965	Single Colour	14.4 W/m	6500K	CRI90	2134 lm	148 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T970	Single Colour	14.4 W/m	7000K	CRI90	2134 lm	148 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W T980	Single Colour	14.4 W/m	8000K	CRI90	2134 lm	148 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W xBL	Single Colour	14.4 W/m	Blue	Color	363 lm	25 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W xGR	Single Colour	14.4 W/m	Green	Color	504 lm	35 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 14W xRE	Single Colour	14.4 W/m	Red	Color	504 lm	35 Lm/W	125 mm	6 m	PDF ↗
FL56/Nx G5 18W 027	Single Colour	18.2 W/m	2700K	CRI95	1724 lm	95 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 030	Single Colour	18.2 W/m	3000K	CRI95	1762 lm	97 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 035	Single Colour	18.2 W/m	3500K	CRI95	1799 lm	99 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 040	Single Colour	18.2 W/m	4000K	CRI95	1822 lm	100 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 914	Single Colour	18.2 W/m	1400K	CRI90	961 lm	53 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 916	Single Colour	18.2 W/m	1600K	CRI90	1158 lm	64 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 918	Single Colour	18.2 W/m	1800K	CRI90	1423 lm	78 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 920	Single Colour	18.2 W/m	2000K	CRI90	1484 lm	82 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 922	Single Colour	18.2 W/m	2200K	CRI90	1606 lm	88 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W 925	Single Colour	18.2 W/m	2500K	CRI90	1742 lm	96 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T927	Single Colour	18.2 W/m	2700K	CRI90	2511 lm	138 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T930	Single Colour	18.2 W/m	3000K	CRI90	2638 lm	145 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T935	Single Colour	18.2 W/m	3500K	CRI90	2706 lm	149 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T940	Single Colour	18.2 W/m	4000K	CRI90	2743 lm	151 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T950	Single Colour	18.2 W/m	5000K	CRI90	2765 lm	152 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T957	Single Colour	18.2 W/m	5700K	CRI90	2668 lm	147 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T965	Single Colour	18.2 W/m	6500K	CRI90	2668 lm	147 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T970	Single Colour	18.2 W/m	7000K	CRI90	2668 lm	147 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W T980	Single Colour	18.2 W/m	8000K	CRI90	2668 lm	147 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W xBL	Single Colour	18.2 W/m	Blue	Color	454 lm	25 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W xGR	Single Colour	18.2 W/m	Green	Color	636 lm	35 Lm/W	125 mm	5 m	PDF ↗
FL56/Nx G5 18W xRE	Single Colour	18.2 W/m	Red	Color	636 lm	35 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 09W 027	RGBW	9.6 W/m	RGB_ / 2700K	RGB_ / CRI95	526 lm	55 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 030	RGBW	9.6 W/m	RGB_ / 3000K	RGB_ / CRI95	531 lm	55 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 035	RGBW	9.6 W/m	RGB_ / 3500K	RGB_ / CRI95	535 lm	56 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 040	RGBW	9.6 W/m	RGB_ / 4000K	RGB_ / CRI95	538 lm	56 Lm/W	125 mm	8 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 6 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
RGBW48/NN G5 09W 914	RGBW	9.6 W/m	RGB_ / 1400K	RGB_ / CRI90	432 lm	45 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 916	RGBW	9.6 W/m	RGB_ / 1600K	RGB_ / CRI90	456 lm	48 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 918	RGBW	9.6 W/m	RGB_ / 1800K	RGB_ / CRI90	573 lm	60 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 920	RGBW	9.6 W/m	RGB_ / 2000K	RGB_ / CRI90	498 lm	52 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 922	RGBW	9.6 W/m	RGB_ / 2200K	RGB_ / CRI90	513 lm	53 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W 925	RGBW	9.6 W/m	RGB_ / 2500K	RGB_ / CRI90	529 lm	55 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T927	RGBW	9.6 W/m	RGB_ / 2700K	RGB_ / CRI90	616 lm	64 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T930	RGBW	9.6 W/m	RGB_ / 3000K	RGB_ / CRI90	631 lm	66 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T935	RGBW	9.6 W/m	RGB_ / 3500K	RGB_ / CRI90	639 lm	67 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T940	RGBW	9.6 W/m	RGB_ / 4000K	RGB_ / CRI90	644 lm	67 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T950	RGBW	9.6 W/m	RGB_ / 5000K	RGB_ / CRI90	645 lm	67 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T957	RGBW	9.6 W/m	RGB_ / 5700K	RGB_ / CRI90	633 lm	66 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T965	RGBW	9.6 W/m	RGB_ / 6500K	RGB_ / CRI90	633 lm	66 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T970	RGBW	9.6 W/m	RGB_ / 7000K	RGB_ / CRI90	633 lm	66 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 09W T980	RGBW	9.6 W/m	RGB_ / 8000K	RGB_ / CRI90	633 lm	66 Lm/W	125 mm	8 m	PDF ↗
RGBW48/NN G5 14W 027	RGBW	14.4 W/m	RGB_ / 2700K	RGB_ / CRI95	764 lm	53 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 030	RGBW	14.4 W/m	RGB_ / 3000K	RGB_ / CRI95	771 lm	54 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 035	RGBW	14.4 W/m	RGB_ / 3500K	RGB_ / CRI95	778 lm	54 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 040	RGBW	14.4 W/m	RGB_ / 4000K	RGB_ / CRI95	782 lm	54 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 914	RGBW	14.4 W/m	RGB_ / 1400K	RGB_ / CRI90	623 lm	43 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 916	RGBW	14.4 W/m	RGB_ / 1600K	RGB_ / CRI90	659 lm	46 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 918	RGBW	14.4 W/m	RGB_ / 1800K	RGB_ / CRI90	622 lm	43 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 920	RGBW	14.4 W/m	RGB_ / 2000K	RGB_ / CRI90	721 lm	50 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 922	RGBW	14.4 W/m	RGB_ / 2200K	RGB_ / CRI90	744 lm	52 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W 925	RGBW	14.4 W/m	RGB_ / 2500K	RGB_ / CRI90	768 lm	53 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T927	RGBW	14.4 W/m	RGB_ / 2700K	RGB_ / CRI90	898 lm	62 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T930	RGBW	14.4 W/m	RGB_ / 3000K	RGB_ / CRI90	921 lm	64 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T935	RGBW	14.4 W/m	RGB_ / 3500K	RGB_ / CRI90	933 lm	65 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T940	RGBW	14.4 W/m	RGB_ / 4000K	RGB_ / CRI90	940 lm	65 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T950	RGBW	14.4 W/m	RGB_ / 5000K	RGB_ / CRI90	881 lm	61 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T957	RGBW	14.4 W/m	RGB_ / 5700K	RGB_ / CRI90	924 lm	64 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T965	RGBW	14.4 W/m	RGB_ / 6500K	RGB_ / CRI90	924 lm	64 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T970	RGBW	14.4 W/m	RGB_ / 7000K	RGB_ / CRI90	924 lm	64 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 14W T980	RGBW	14.4 W/m	RGB_ / 8000K	RGB_ / CRI90	924 lm	64 Lm/W	125 mm	7 m	PDF ↗
RGBW48/NN G5 19W 027	RGBW	19.2 W/m	RGB_ / 2700K	RGB_ / CRI95	1138 lm	59 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 030	RGBW	19.2 W/m	RGB_ / 3000K	RGB_ / CRI95	1152 lm	60 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 035	RGBW	19.2 W/m	RGB_ / 3500K	RGB_ / CRI95	1167 lm	61 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 040	RGBW	19.2 W/m	RGB_ / 4000K	RGB_ / CRI95	1175 lm	61 Lm/W	125 mm	5.5 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 7 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
RGBW48/NN G5 19W 914	RGBW	19.2 W/m	RGB_ / 1400K	RGB_ / CRI90	845 lm	44 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 916	RGBW	19.2 W/m	RGB_ / 1600K	RGB_ / CRI90	920 lm	48 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 918	RGBW	19.2 W/m	RGB_ / 1800K	RGB_ / CRI90	1021 lm	53 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 920	RGBW	19.2 W/m	RGB_ / 2000K	RGB_ / CRI90	1047 lm	55 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 922	RGBW	19.2 W/m	RGB_ / 2200K	RGB_ / CRI90	1093 lm	57 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W 925	RGBW	19.2 W/m	RGB_ / 2500K	RGB_ / CRI90	1145 lm	60 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T927	RGBW	19.2 W/m	RGB_ / 2700K	RGB_ / CRI90	1422 lm	74 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T930	RGBW	19.2 W/m	RGB_ / 3000K	RGB_ / CRI90	1470 lm	77 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T935	RGBW	19.2 W/m	RGB_ / 3500K	RGB_ / CRI90	1495 lm	78 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T940	RGBW	19.2 W/m	RGB_ / 4000K	RGB_ / CRI90	1509 lm	79 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T950	RGBW	19.2 W/m	RGB_ / 5000K	RGB_ / CRI90	1515 lm	79 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T957	RGBW	19.2 W/m	RGB_ / 5700K	RGB_ / CRI90	1478 lm	77 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T965	RGBW	19.2 W/m	RGB_ / 6500K	RGB_ / CRI90	1478 lm	77 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T970	RGBW	19.2 W/m	RGB_ / 7000K	RGB_ / CRI90	1478 lm	77 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 19W T980	RGBW	19.2 W/m	RGB_ / 8000K	RGB_ / CRI90	1478 lm	77 Lm/W	125 mm	5.5 m	PDF ↗
RGBW48/NN G5 24W 027	RGBW	24 W/m	RGB_ / 2700K	RGB_ / CRI95	1522 lm	63 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 030	RGBW	24 W/m	RGB_ / 3000K	RGB_ / CRI95	1545 lm	64 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 035	RGBW	24 W/m	RGB_ / 3500K	RGB_ / CRI95	1568 lm	65 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 040	RGBW	24 W/m	RGB_ / 4000K	RGB_ / CRI95	1582 lm	66 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 914	RGBW	24 W/m	RGB_ / 1400K	RGB_ / CRI90	1061 lm	44 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 916	RGBW	24 W/m	RGB_ / 1600K	RGB_ / CRI90	1180 lm	49 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 918	RGBW	24 W/m	RGB_ / 1800K	RGB_ / CRI90	1340 lm	56 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 920	RGBW	24 W/m	RGB_ / 2000K	RGB_ / CRI90	1378 lm	57 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 922	RGBW	24 W/m	RGB_ / 2200K	RGB_ / CRI90	1451 lm	60 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W 925	RGBW	24 W/m	RGB_ / 2500K	RGB_ / CRI90	1533 lm	64 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T927	RGBW	24 W/m	RGB_ / 2700K	RGB_ / CRI90	1984 lm	83 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T930	RGBW	24 W/m	RGB_ / 3000K	RGB_ / CRI90	2060 lm	86 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T935	RGBW	24 W/m	RGB_ / 3500K	RGB_ / CRI90	2101 lm	88 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T940	RGBW	24 W/m	RGB_ / 4000K	RGB_ / CRI90	2123 lm	88 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T950	RGBW	24 W/m	RGB_ / 5000K	RGB_ / CRI90	2134 lm	89 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T957	RGBW	24 W/m	RGB_ / 5700K	RGB_ / CRI90	2075 lm	86 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T965	RGBW	24 W/m	RGB_ / 6500K	RGB_ / CRI90	2075 lm	86 Lm/W	125 mm	5 m	PDF ↗
RGBW48/NN G5 24W T970	RGBW	24 W/m	RGB_ / 7000K	RGB_ / CRI90	2075 lm	86 Lm/W	125 mm	5 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 8 OF
21

ARCHITAPE INDOOR LED TAPE SERIES

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 09W 027/040	Tunable White	9.6 W/m	2700K / 4000K	CRI95	1000 lm	104 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T930	Tunable White	9.6 W/m	2700K / 3000K	CRI95 / CRI90	1216 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T935	Tunable White	9.6 W/m	2700K / 3500K	CRI95 / CRI90	1234 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T940	Tunable White	9.6 W/m	2700K / 4000K	CRI95 / CRI90	1245 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T950	Tunable White	9.6 W/m	2700K / 5000K	CRI95 / CRI90	1248 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T957	Tunable White	9.6 W/m	2700K / 5700K	CRI95 / CRI90	1221 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T965	Tunable White	9.6 W/m	2700K / 6500K	CRI95 / CRI90	1221 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T970	Tunable White	9.6 W/m	2700K / 7000K	CRI95 / CRI90	1221 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 027/T980	Tunable White	9.6 W/m	2700K / 8000K	CRI95 / CRI90	1221 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/035	Tunable White	9.6 W/m	3000K / 3500K	CRI95	1004 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/040	Tunable White	9.6 W/m	3000K / 4000K	CRI95	1011 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T935	Tunable White	9.6 W/m	3000K / 3500K	CRI95 / CRI90	1245 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T940	Tunable White	9.6 W/m	3000K / 4000K	CRI95 / CRI90	1256 lm	131 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T950	Tunable White	9.6 W/m	3000K / 5000K	CRI95 / CRI90	1259 lm	131 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T957	Tunable White	9.6 W/m	3000K / 5700K	CRI95 / CRI90	1232 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T965	Tunable White	9.6 W/m	3000K / 6500K	CRI95 / CRI90	1232 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T970	Tunable White	9.6 W/m	3000K / 7000K	CRI95 / CRI90	1232 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 030/T980	Tunable White	9.6 W/m	3000K / 8000K	CRI95 / CRI90	1232 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/040	Tunable White	9.6 W/m	3500K / 4000K	CRI95	1021 lm	106 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T940	Tunable White	9.6 W/m	3500K / 4000K	CRI95 / CRI90	1266 lm	132 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T950	Tunable White	9.6 W/m	3500K / 5000K	CRI95 / CRI90	1269 lm	132 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T957	Tunable White	9.6 W/m	3500K / 5700K	CRI95 / CRI90	1242 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T965	Tunable White	9.6 W/m	3500K / 6500K	CRI95 / CRI90	1242 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T970	Tunable White	9.6 W/m	3500K / 7000K	CRI95 / CRI90	1242 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 035/T980	Tunable White	9.6 W/m	3500K / 8000K	CRI95 / CRI90	1242 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 040/T950	Tunable White	9.6 W/m	4000K / 5000K	CRI95 / CRI90	1276 lm	133 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 040/T957	Tunable White	9.6 W/m	4000K / 5700K	CRI95 / CRI90	1249 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 040/T965	Tunable White	9.6 W/m	4000K / 6500K	CRI95 / CRI90	1249 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 040/T970	Tunable White	9.6 W/m	4000K / 7000K	CRI95 / CRI90	1249 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 040/T980	Tunable White	9.6 W/m	4000K / 8000K	CRI95 / CRI90	1249 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/027	Tunable White	9.6 W/m	1400K / 2700K	CRI90 / CRI95	755 lm	79 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/030	Tunable White	9.6 W/m	1400K / 3000K	CRI90 / CRI95	766 lm	80 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/035	Tunable White	9.6 W/m	1400K / 3500K	CRI90 / CRI95	776 lm	81 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/040	Tunable White	9.6 W/m	1400K / 4000K	CRI90 / CRI95	783 lm	82 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/916	Tunable White	9.6 W/m	1400K / 1600K	CRI90	594 lm	62 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/918	Tunable White	9.6 W/m	1400K / 1800K	CRI90	668 lm	70 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/920	Tunable White	9.6 W/m	1400K / 2000K	CRI90	689 lm	72 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/922	Tunable White	9.6 W/m	1400K / 2200K	CRI90	723 lm	75 Lm/W	125 mm	8 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 9 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 09W 914/925	Tunable White	9.6 W/m	1400K / 2500K	CRI90	762 lm	79 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T927	Tunable White	9.6 W/m	1400K / 2700K	CRI90	964 lm	100 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T930	Tunable White	9.6 W/m	1400K / 3000K	CRI90	999 lm	104 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T935	Tunable White	9.6 W/m	1400K / 3500K	CRI90	1017 lm	106 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T940	Tunable White	9.6 W/m	1400K / 4000K	CRI90	1028 lm	107 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T950	Tunable White	9.6 W/m	1400K / 5000K	CRI90	1031 lm	107 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T957	Tunable White	9.6 W/m	1400K / 5700K	CRI90	1004 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T965	Tunable White	9.6 W/m	1400K / 6500K	CRI90	1004 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T970	Tunable White	9.6 W/m	1400K / 7000K	CRI90	1004 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 914/T980	Tunable White	9.6 W/m	1400K / 8000K	CRI90	1004 lm	105 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/027	Tunable White	9.6 W/m	1600K / 2700K	CRI90 / CRI95	811 lm	84 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/030	Tunable White	9.6 W/m	1600K / 3000K	CRI90 / CRI95	822 lm	86 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/035	Tunable White	9.6 W/m	1600K / 3500K	CRI90 / CRI95	832 lm	87 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/040	Tunable White	9.6 W/m	1600K / 4000K	CRI90 / CRI95	839 lm	87 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/918	Tunable White	9.6 W/m	1600K / 1800K	CRI90	724 lm	75 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/920	Tunable White	9.6 W/m	1600K / 2000K	CRI90	745 lm	78 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/922	Tunable White	9.6 W/m	1600K / 2200K	CRI90	779 lm	81 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/925	Tunable White	9.6 W/m	1600K / 2500K	CRI90	818 lm	85 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T927	Tunable White	9.6 W/m	1600K / 2700K	CRI90	1020 lm	106 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T930	Tunable White	9.6 W/m	1600K / 3000K	CRI90	1055 lm	110 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T935	Tunable White	9.6 W/m	1600K / 3500K	CRI90	1073 lm	112 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T940	Tunable White	9.6 W/m	1600K / 4000K	CRI90	1084 lm	113 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T950	Tunable White	9.6 W/m	1600K / 5000K	CRI90	1087 lm	113 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T957	Tunable White	9.6 W/m	1600K / 5700K	CRI90	1060 lm	110 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T965	Tunable White	9.6 W/m	1600K / 6500K	CRI90	1060 lm	110 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T970	Tunable White	9.6 W/m	1600K / 7000K	CRI90	1060 lm	110 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 916/T980	Tunable White	9.6 W/m	1600K / 8000K	CRI90	1060 lm	110 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/027	Tunable White	9.6 W/m	1800K / 2700K	CRI90 / CRI95	885 lm	92 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/030	Tunable White	9.6 W/m	1800K / 3000K	CRI90 / CRI95	896 lm	93 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/035	Tunable White	9.6 W/m	1800K / 3500K	CRI90 / CRI95	906 lm	94 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/040	Tunable White	9.6 W/m	1800K / 4000K	CRI90 / CRI95	913 lm	95 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/920	Tunable White	9.6 W/m	1800K / 2000K	CRI90	819 lm	85 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/922	Tunable White	9.6 W/m	1800K / 2200K	CRI90	853 lm	89 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/925	Tunable White	9.6 W/m	1800K / 2500K	CRI90	892 lm	93 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T927	Tunable White	9.6 W/m	1800K / 2700K	CRI90	1094 lm	114 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T930	Tunable White	9.6 W/m	1800K / 3000K	CRI90	1129 lm	118 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T935	Tunable White	9.6 W/m	1800K / 3500K	CRI90	1147 lm	119 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T940	Tunable White	9.6 W/m	1800K / 4000K	CRI90	1158 lm	121 Lm/W	125 mm	8 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 10 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 09W 918/T950	Tunable White	9.6 W/m	1800K / 5000K	CRI90	1161 lm	121 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T957	Tunable White	9.6 W/m	1800K / 5700K	CRI90	1134 lm	118 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T965	Tunable White	9.6 W/m	1800K / 6500K	CRI90	1134 lm	118 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T970	Tunable White	9.6 W/m	1800K / 7000K	CRI90	1134 lm	118 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 918/T980	Tunable White	9.6 W/m	1800K / 8000K	CRI90	1134 lm	118 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/027	Tunable White	9.6 W/m	2000K / 2700K	CRI90 / CRI95	906 lm	94 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/030	Tunable White	9.6 W/m	2000K / 3000K	CRI90 / CRI95	917 lm	96 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/035	Tunable White	9.6 W/m	2000K / 3500K	CRI90 / CRI95	927 lm	97 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/040	Tunable White	9.6 W/m	2000K / 4000K	CRI90 / CRI95	934 lm	97 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/922	Tunable White	9.6 W/m	2000K / 2200K	CRI90	874 lm	91 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/925	Tunable White	9.6 W/m	2000K / 2500K	CRI90	913 lm	95 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T927	Tunable White	9.6 W/m	2000K / 2700K	CRI90	1115 lm	116 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T930	Tunable White	9.6 W/m	2000K / 3000K	CRI90	1150 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T935	Tunable White	9.6 W/m	2000K / 3500K	CRI90	1168 lm	122 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T940	Tunable White	9.6 W/m	2000K / 4000K	CRI90	1179 lm	123 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T950	Tunable White	9.6 W/m	2000K / 5000K	CRI90	1182 lm	123 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T957	Tunable White	9.6 W/m	2000K / 5700K	CRI90	1155 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T965	Tunable White	9.6 W/m	2000K / 6500K	CRI90	1155 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T970	Tunable White	9.6 W/m	2000K / 7000K	CRI90	1155 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 920/T980	Tunable White	9.6 W/m	2000K / 8000K	CRI90	1155 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/027	Tunable White	9.6 W/m	2200K / 2700K	CRI90 / CRI95	940 lm	98 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/030	Tunable White	9.6 W/m	2200K / 3000K	CRI90 / CRI95	951 lm	99 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/035	Tunable White	9.6 W/m	2200K / 3500K	CRI90 / CRI95	961 lm	100 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/040	Tunable White	9.6 W/m	2200K / 4000K	CRI90 / CRI95	968 lm	101 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/925	Tunable White	9.6 W/m	2200K / 2500K	CRI90	947 lm	99 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T927	Tunable White	9.6 W/m	2200K / 2700K	CRI90	1149 lm	120 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T930	Tunable White	9.6 W/m	2200K / 3000K	CRI90	1184 lm	123 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T935	Tunable White	9.6 W/m	2200K / 3500K	CRI90	1202 lm	125 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T940	Tunable White	9.6 W/m	2200K / 4000K	CRI90	1213 lm	126 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T950	Tunable White	9.6 W/m	2200K / 5000K	CRI90	1216 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T957	Tunable White	9.6 W/m	2200K / 5700K	CRI90	1189 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T965	Tunable White	9.6 W/m	2200K / 6500K	CRI90	1189 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T970	Tunable White	9.6 W/m	2200K / 7000K	CRI90	1189 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 922/T980	Tunable White	9.6 W/m	2200K / 8000K	CRI90	1189 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/027	Tunable White	9.6 W/m	2500K / 2700K	CRI90 / CRI95	979 lm	102 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/030	Tunable White	9.6 W/m	2500K / 3000K	CRI90 / CRI95	990 lm	103 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/035	Tunable White	9.6 W/m	2500K / 3500K	CRI90 / CRI95	1000 lm	104 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/040	Tunable White	9.6 W/m	2500K / 4000K	CRI90 / CRI95	1007 lm	105 Lm/W	125 mm	8 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 11 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 09W 925/T927	Tunable White	9.6 W/m	2500K / 2700K	CRI90	1188 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T930	Tunable White	9.6 W/m	2500K / 3000K	CRI90	1223 lm	127 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T935	Tunable White	9.6 W/m	2500K / 3500K	CRI90	1241 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T940	Tunable White	9.6 W/m	2500K / 4000K	CRI90	1252 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T950	Tunable White	9.6 W/m	2500K / 5000K	CRI90	1255 lm	131 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T957	Tunable White	9.6 W/m	2500K / 5700K	CRI90	1228 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T965	Tunable White	9.6 W/m	2500K / 6500K	CRI90	1228 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T970	Tunable White	9.6 W/m	2500K / 7000K	CRI90	1228 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W 925/T980	Tunable White	9.6 W/m	2500K / 8000K	CRI90	1228 lm	128 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/030	Tunable White	9.6 W/m	2700K / 3000K	CRI90 / CRI95	1192 lm	124 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/035	Tunable White	9.6 W/m	2700K / 3500K	CRI90 / CRI95	1202 lm	125 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/040	Tunable White	9.6 W/m	2700K / 4000K	CRI90 / CRI95	1209 lm	126 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T930	Tunable White	9.6 W/m	2700K / 3000K	CRI90	1425 lm	148 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T935	Tunable White	9.6 W/m	2700K / 3500K	CRI90	1443 lm	150 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T940	Tunable White	9.6 W/m	2700K / 4000K	CRI90	1454 lm	151 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T950	Tunable White	9.6 W/m	2700K / 5000K	CRI90	1457 lm	152 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T957	Tunable White	9.6 W/m	2700K / 5700K	CRI90	1430 lm	149 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T965	Tunable White	9.6 W/m	2700K / 6500K	CRI90	1430 lm	149 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T970	Tunable White	9.6 W/m	2700K / 7000K	CRI90	1430 lm	149 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T927/T980	Tunable White	9.6 W/m	2700K / 8000K	CRI90	1430 lm	149 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/035	Tunable White	9.6 W/m	3000K / 3500K	CRI90 / CRI95	1237 lm	129 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/040	Tunable White	9.6 W/m	3000K / 4000K	CRI90 / CRI95	1244 lm	130 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T935	Tunable White	9.6 W/m	3000K / 3500K	CRI90	1478 lm	154 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T940	Tunable White	9.6 W/m	3000K / 4000K	CRI90	1489 lm	155 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T950	Tunable White	9.6 W/m	3000K / 5000K	CRI90	1492 lm	155 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T957	Tunable White	9.6 W/m	3000K / 5700K	CRI90	1465 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T965	Tunable White	9.6 W/m	3000K / 6500K	CRI90	1465 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T970	Tunable White	9.6 W/m	3000K / 7000K	CRI90	1465 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T930/T980	Tunable White	9.6 W/m	3000K / 8000K	CRI90	1465 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/040	Tunable White	9.6 W/m	3500K / 4000K	CRI90 / CRI95	1262 lm	131 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T940	Tunable White	9.6 W/m	3500K / 4000K	CRI90	1507 lm	157 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T950	Tunable White	9.6 W/m	3500K / 5000K	CRI90	1510 lm	157 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T957	Tunable White	9.6 W/m	3500K / 5700K	CRI90	1483 lm	154 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T965	Tunable White	9.6 W/m	3500K / 6500K	CRI90	1483 lm	154 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T970	Tunable White	9.6 W/m	3500K / 7000K	CRI90	1483 lm	154 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T935/T980	Tunable White	9.6 W/m	3500K / 8000K	CRI90	1483 lm	154 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T940/T950	Tunable White	9.6 W/m	4000K / 5000K	CRI90	1521 lm	158 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T940/T957	Tunable White	9.6 W/m	4000K / 5700K	CRI90	1494 lm	156 Lm/W	125 mm	8 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 12 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 09W T940/T965	Tunable White	9.6 W/m	4000K / 6500K	CRI90	1494 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T940/T970	Tunable White	9.6 W/m	4000K / 7000K	CRI90	1494 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T940/T980	Tunable White	9.6 W/m	4000K / 8000K	CRI90	1494 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T950/T957	Tunable White	9.6 W/m	5000K / 5700K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T950/T965	Tunable White	9.6 W/m	5000K / 6500K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T950/T970	Tunable White	9.6 W/m	5000K / 7000K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T950/T980	Tunable White	9.6 W/m	5000K / 8000K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T957/T965	Tunable White	9.6 W/m	5700K / 6500K	CRI90	1470 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T957/T970	Tunable White	9.6 W/m	5700K / 7000K	CRI90	1470 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T957/T980	Tunable White	9.6 W/m	5700K / 8000K	CRI90	1470 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T965/T970	Tunable White	9.6 W/m	6500K / 7000K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T965/T980	Tunable White	9.6 W/m	6500K / 8000K	CRI90	1497 lm	156 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 09W T970/T980	Tunable White	9.6 W/m	7000K / 8000K	CRI90	1470 lm	153 Lm/W	125 mm	8 m	PDF ↗
TW56/NN G5 19W 027/030	Tunable White	19.2 W/m	2700K / 3000K	CRI95	1921 lm	100 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/035	Tunable White	19.2 W/m	2700K / 3500K	CRI95	1942 lm	101 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/040	Tunable White	19.2 W/m	2700K / 4000K	CRI95	1954 lm	102 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T930	Tunable White	19.2 W/m	2700K / 3000K	CRI95 / CRI90	2384 lm	124 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T935	Tunable White	19.2 W/m	2700K / 3500K	CRI95 / CRI90	2420 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T940	Tunable White	19.2 W/m	2700K / 4000K	CRI95 / CRI90	2441 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T950	Tunable White	19.2 W/m	2700K / 5000K	CRI95 / CRI90	2449 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T957	Tunable White	19.2 W/m	2700K / 5700K	CRI95 / CRI90	2396 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T965	Tunable White	19.2 W/m	2700K / 6500K	CRI95 / CRI90	2396 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T970	Tunable White	19.2 W/m	2700K / 7000K	CRI95 / CRI90	2396 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 027/T980	Tunable White	19.2 W/m	2700K / 8000K	CRI95 / CRI90	2396 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/035	Tunable White	19.2 W/m	3000K / 3500K	CRI95	1963 lm	102 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/040	Tunable White	19.2 W/m	3000K / 4000K	CRI95	1975 lm	103 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T935	Tunable White	19.2 W/m	3000K / 3500K	CRI95 / CRI90	2441 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T940	Tunable White	19.2 W/m	3000K / 4000K	CRI95 / CRI90	2462 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T950	Tunable White	19.2 W/m	3000K / 5000K	CRI95 / CRI90	2470 lm	129 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T957	Tunable White	19.2 W/m	3000K / 5700K	CRI95 / CRI90	2417 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T965	Tunable White	19.2 W/m	3000K / 6500K	CRI95 / CRI90	2417 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T970	Tunable White	19.2 W/m	3000K / 7000K	CRI95 / CRI90	2417 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 030/T980	Tunable White	19.2 W/m	3000K / 8000K	CRI95 / CRI90	2417 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/040	Tunable White	19.2 W/m	3500K / 4000K	CRI95	1996 lm	104 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/T940	Tunable White	19.2 W/m	3500K / 4000K	CRI95 / CRI90	2483 lm	129 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/T950	Tunable White	19.2 W/m	3500K / 5000K	CRI95 / CRI90	2491 lm	130 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/T957	Tunable White	19.2 W/m	3500K / 5700K	CRI95 / CRI90	2438 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/T965	Tunable White	19.2 W/m	3500K / 6500K	CRI95 / CRI90	2438 lm	127 Lm/W	125 mm	4.5 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 13 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 19W 035/T970	Tunable White	19.2 W/m	3500K / 7000K	CRI95 / CRI90	2438 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 035/T980	Tunable White	19.2 W/m	3500K / 8000K	CRI95 / CRI90	2438 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 040/T950	Tunable White	19.2 W/m	4000K / 5000K	CRI95 / CRI90	2503 lm	130 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 040/T957	Tunable White	19.2 W/m	4000K / 5700K	CRI95 / CRI90	2450 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 040/T965	Tunable White	19.2 W/m	4000K / 6500K	CRI95 / CRI90	2450 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 040/T970	Tunable White	19.2 W/m	4000K / 7000K	CRI95 / CRI90	2450 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 040/T980	Tunable White	19.2 W/m	4000K / 8000K	CRI95 / CRI90	2450 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/027	Tunable White	19.2 W/m	1400K / 2700K	CRI90 / CRI95	1479 lm	77 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/030	Tunable White	19.2 W/m	1400K / 3000K	CRI90 / CRI95	1500 lm	78 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/035	Tunable White	19.2 W/m	1400K / 3500K	CRI90 / CRI95	1521 lm	79 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/040	Tunable White	19.2 W/m	1400K / 4000K	CRI90 / CRI95	1533 lm	80 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/916	Tunable White	19.2 W/m	1400K / 1600K	CRI90	1420 lm	74 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/918	Tunable White	19.2 W/m	1400K / 1800K	CRI90	1566 lm	82 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/920	Tunable White	19.2 W/m	1400K / 2000K	CRI90	1347 lm	70 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/922	Tunable White	19.2 W/m	1400K / 2200K	CRI90	1414 lm	74 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/925	Tunable White	19.2 W/m	1400K / 2500K	CRI90	1489 lm	78 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T927	Tunable White	19.2 W/m	1400K / 2700K	CRI90	1893 lm	99 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T930	Tunable White	19.2 W/m	1400K / 3000K	CRI90	1963 lm	102 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T935	Tunable White	19.2 W/m	1400K / 3500K	CRI90	1999 lm	104 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T940	Tunable White	19.2 W/m	1400K / 4000K	CRI90	2020 lm	105 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T950	Tunable White	19.2 W/m	1400K / 5000K	CRI90	2028 lm	106 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T957	Tunable White	19.2 W/m	1400K / 5700K	CRI90	1975 lm	103 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T965	Tunable White	19.2 W/m	1400K / 6500K	CRI90	1975 lm	103 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T970	Tunable White	19.2 W/m	1400K / 7000K	CRI90	1975 lm	103 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 914/T980	Tunable White	19.2 W/m	1400K / 8000K	CRI90	1975 lm	103 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/027	Tunable White	19.2 W/m	1600K / 2700K	CRI90 / CRI95	1587 lm	83 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/030	Tunable White	19.2 W/m	1600K / 3000K	CRI90 / CRI95	1608 lm	84 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/035	Tunable White	19.2 W/m	1600K / 3500K	CRI90 / CRI95	1629 lm	85 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/040	Tunable White	19.2 W/m	1600K / 4000K	CRI90 / CRI95	1641 lm	85 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/918	Tunable White	19.2 W/m	1600K / 1800K	CRI90	1420 lm	74 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/920	Tunable White	19.2 W/m	1600K / 2000K	CRI90	1455 lm	76 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/922	Tunable White	19.2 W/m	1600K / 2200K	CRI90	1522 lm	79 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/925	Tunable White	19.2 W/m	1600K / 2500K	CRI90	1597 lm	83 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T927	Tunable White	19.2 W/m	1600K / 2700K	CRI90	2001 lm	104 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T930	Tunable White	19.2 W/m	1600K / 3000K	CRI90	2071 lm	108 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T935	Tunable White	19.2 W/m	1600K / 3500K	CRI90	2107 lm	110 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T940	Tunable White	19.2 W/m	1600K / 4000K	CRI90	2128 lm	111 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T950	Tunable White	19.2 W/m	1600K / 5000K	CRI90	2136 lm	111 Lm/W	125 mm	4.5 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 14 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 19W 916/T957	Tunable White	19.2 W/m	1600K / 5700K	CRI90	2083 lm	108 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T965	Tunable White	19.2 W/m	1600K / 6500K	CRI90	2083 lm	108 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T970	Tunable White	19.2 W/m	1600K / 7000K	CRI90	2083 lm	108 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 916/T980	Tunable White	19.2 W/m	1600K / 8000K	CRI90	2083 lm	108 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/027	Tunable White	19.2 W/m	1800K / 2700K	CRI90 / CRI95	1733 lm	90 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/030	Tunable White	19.2 W/m	1800K / 3000K	CRI90 / CRI95	1754 lm	91 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/035	Tunable White	19.2 W/m	1800K / 3500K	CRI90 / CRI95	1775 lm	92 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/040	Tunable White	19.2 W/m	1800K / 4000K	CRI90 / CRI95	1787 lm	93 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/920	Tunable White	19.2 W/m	1800K / 2000K	CRI90	1601 lm	83 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/922	Tunable White	19.2 W/m	1800K / 2200K	CRI90	1668 lm	87 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/925	Tunable White	19.2 W/m	1800K / 2500K	CRI90	1743 lm	91 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/927	Tunable White	19.2 W/m	1800K / 2700K	CRI90	2147 lm	112 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/930	Tunable White	19.2 W/m	1800K / 3000K	CRI90	2217 lm	115 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/935	Tunable White	19.2 W/m	1800K / 3500K	CRI90	2253 lm	117 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/940	Tunable White	19.2 W/m	1800K / 4000K	CRI90	2274 lm	118 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/950	Tunable White	19.2 W/m	1800K / 5000K	CRI90	2282 lm	119 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/T957	Tunable White	19.2 W/m	1800K / 5700K	CRI90	2229 lm	116 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/T965	Tunable White	19.2 W/m	1800K / 6500K	CRI90	2229 lm	116 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/T970	Tunable White	19.2 W/m	1800K / 7000K	CRI90	2229 lm	116 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 918/T980	Tunable White	19.2 W/m	1800K / 8000K	CRI90	2229 lm	116 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/027	Tunable White	19.2 W/m	2000K / 2700K	CRI90 / CRI95	1768 lm	92 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/030	Tunable White	19.2 W/m	2000K / 3000K	CRI90 / CRI95	1789 lm	93 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/035	Tunable White	19.2 W/m	2000K / 3500K	CRI90 / CRI95	1810 lm	94 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/040	Tunable White	19.2 W/m	2000K / 4000K	CRI90 / CRI95	1822 lm	95 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/922	Tunable White	19.2 W/m	2000K / 2200K	CRI90	1703 lm	89 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/925	Tunable White	19.2 W/m	2000K / 2500K	CRI90	1778 lm	93 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T927	Tunable White	19.2 W/m	2000K / 2700K	CRI90	2182 lm	114 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T930	Tunable White	19.2 W/m	2000K / 3000K	CRI90	2252 lm	117 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T935	Tunable White	19.2 W/m	2000K / 3500K	CRI90	2288 lm	119 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T940	Tunable White	19.2 W/m	2000K / 4000K	CRI90	2309 lm	120 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T950	Tunable White	19.2 W/m	2000K / 5000K	CRI90	2317 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T957	Tunable White	19.2 W/m	2000K / 5700K	CRI90	2264 lm	118 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T965	Tunable White	19.2 W/m	2000K / 6500K	CRI90	2264 lm	118 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T970	Tunable White	19.2 W/m	2000K / 7000K	CRI90	2264 lm	118 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 920/T980	Tunable White	19.2 W/m	2000K / 8000K	CRI90	2264 lm	118 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/027	Tunable White	19.2 W/m	2200K / 2700K	CRI90 / CRI95	1835 lm	96 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/030	Tunable White	19.2 W/m	2200K / 3000K	CRI90 / CRI95	1856 lm	97 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/035	Tunable White	19.2 W/m	2200K / 3500K	CRI90 / CRI95	1877 lm	98 Lm/W	125 mm	4.5 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 15 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 19W 922/040	Tunable White	19.2 W/m	2200K / 4000K	CRI90 / CRI95	1889 lm	98 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/925	Tunable White	19.2 W/m	2200K / 2500K	CRI90	1845 lm	96 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T927	Tunable White	19.2 W/m	2200K / 2700K	CRI90	2249 lm	117 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T930	Tunable White	19.2 W/m	2200K / 3000K	CRI90	2319 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T935	Tunable White	19.2 W/m	2200K / 3500K	CRI90	2355 lm	123 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T940	Tunable White	19.2 W/m	2200K / 4000K	CRI90	2376 lm	124 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T950	Tunable White	19.2 W/m	2200K / 5000K	CRI90	2384 lm	124 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T957	Tunable White	19.2 W/m	2200K / 5700K	CRI90	2331 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T965	Tunable White	19.2 W/m	2200K / 6500K	CRI90	2331 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T970	Tunable White	19.2 W/m	2200K / 7000K	CRI90	2331 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 922/T980	Tunable White	19.2 W/m	2200K / 8000K	CRI90	2331 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/027	Tunable White	19.2 W/m	2500K / 2700K	CRI90 / CRI95	1910 lm	99 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/030	Tunable White	19.2 W/m	2500K / 3000K	CRI90 / CRI95	1931 lm	101 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/035	Tunable White	19.2 W/m	2500K / 3500K	CRI90 / CRI95	1952 lm	102 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/040	Tunable White	19.2 W/m	2500K / 4000K	CRI90 / CRI95	1964 lm	102 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T927	Tunable White	19.2 W/m	2500K / 2700K	CRI90	2324 lm	121 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T930	Tunable White	19.2 W/m	2500K / 3000K	CRI90	2394 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T935	Tunable White	19.2 W/m	2500K / 3500K	CRI90	2430 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T940	Tunable White	19.2 W/m	2500K / 4000K	CRI90	2451 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T950	Tunable White	19.2 W/m	2500K / 5000K	CRI90	2459 lm	128 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T957	Tunable White	19.2 W/m	2500K / 5700K	CRI90	2406 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T965	Tunable White	19.2 W/m	2500K / 6500K	CRI90	2406 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T970	Tunable White	19.2 W/m	2500K / 7000K	CRI90	2406 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W 925/T980	Tunable White	19.2 W/m	2500K / 8000K	CRI90	2406 lm	125 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/030	Tunable White	19.2 W/m	2700K / 3000K	CRI90 / CRI95	2335 lm	122 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/035	Tunable White	19.2 W/m	2700K / 3500K	CRI90 / CRI95	2356 lm	123 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/040	Tunable White	19.2 W/m	2700K / 4000K	CRI90 / CRI95	2368 lm	123 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T930	Tunable White	19.2 W/m	2700K / 3000K	CRI90	2798 lm	146 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T935	Tunable White	19.2 W/m	2700K / 3500K	CRI90	2834 lm	148 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T940	Tunable White	19.2 W/m	2700K / 4000K	CRI90	2855 lm	149 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T950	Tunable White	19.2 W/m	2700K / 5000K	CRI90	2863 lm	149 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T957	Tunable White	19.2 W/m	2700K / 5700K	CRI90	2810 lm	146 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T965	Tunable White	19.2 W/m	2700K / 6500K	CRI90	2810 lm	146 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T970	Tunable White	19.2 W/m	2700K / 7000K	CRI90	2810 lm	146 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T927/T980	Tunable White	19.2 W/m	2700K / 8000K	CRI90	2810 lm	146 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/035	Tunable White	19.2 W/m	3000K / 3500K	CRI90 / CRI95	2426 lm	126 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/040	Tunable White	19.2 W/m	3000K / 4000K	CRI90 / CRI95	2438 lm	127 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T935	Tunable White	19.2 W/m	3000K / 3500K	CRI90	2904 lm	151 Lm/W	125 mm	4.5 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 16 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 19W T930/T940	Tunable White	19.2 W/m	3000K / 4000K	CRI90	2925 lm	152 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T950	Tunable White	19.2 W/m	3000K / 5000K	CRI90	2933 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T957	Tunable White	19.2 W/m	3000K / 5700K	CRI90	2880 lm	150 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T965	Tunable White	19.2 W/m	3000K / 6500K	CRI90	2880 lm	150 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T970	Tunable White	19.2 W/m	3000K / 7000K	CRI90	2880 lm	150 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T930/T980	Tunable White	19.2 W/m	3000K / 8000K	CRI90	2880 lm	150 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/040	Tunable White	19.2 W/m	3500K / 4000K	CRI90 / CRI95	2474 lm	129 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T940	Tunable White	19.2 W/m	3500K / 4000K	CRI90	2961 lm	154 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T950	Tunable White	19.2 W/m	3500K / 5000K	CRI90	2969 lm	155 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T957	Tunable White	19.2 W/m	3500K / 5700K	CRI90	2916 lm	152 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T965	Tunable White	19.2 W/m	3500K / 6500K	CRI90	2916 lm	152 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T970	Tunable White	19.2 W/m	3500K / 7000K	CRI90	2916 lm	152 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T935/T980	Tunable White	19.2 W/m	3500K / 8000K	CRI90	2916 lm	152 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T940/T950	Tunable White	19.2 W/m	4000K / 5000K	CRI90	2990 lm	156 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T940/T957	Tunable White	19.2 W/m	4000K / 5700K	CRI90	2937 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T940/T965	Tunable White	19.2 W/m	4000K / 6500K	CRI90	2937 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T940/T970	Tunable White	19.2 W/m	4000K / 7000K	CRI90	2937 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T940/T980	Tunable White	19.2 W/m	4000K / 8000K	CRI90	2937 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T950/T957	Tunable White	19.2 W/m	5000K / 5700K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T950/T965	Tunable White	19.2 W/m	5000K / 6500K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T950/T970	Tunable White	19.2 W/m	5000K / 7000K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T950/T980	Tunable White	19.2 W/m	5000K / 8000K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T957/T965	Tunable White	19.2 W/m	5700K / 6500K	CRI90	2892 lm	151 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T957/T970	Tunable White	19.2 W/m	5700K / 7000K	CRI90	2892 lm	151 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T957/T980	Tunable White	19.2 W/m	5700K / 8000K	CRI90	2892 lm	151 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T965/T970	Tunable White	19.2 W/m	6500K / 7000K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T965/T980	Tunable White	19.2 W/m	6500K / 8000K	CRI90	2945 lm	153 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 19W T970/T980	Tunable White	19.2 W/m	7000K / 8000K	CRI90	2892 lm	151 Lm/W	125 mm	4.5 m	PDF ↗
TW56/NN G5 33W 027/030	Tunable White	33.4 W/m	2700K / 3000K	CRI95	3217 lm	96 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/035	Tunable White	33.4 W/m	2700K / 3500K	CRI95	3252 lm	97 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/040	Tunable White	33.4 W/m	2700K / 4000K	CRI95	3273 lm	98 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T930	Tunable White	33.4 W/m	2700K / 3000K	CRI95 / CRI90	4021 lm	120 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T935	Tunable White	33.4 W/m	2700K / 3500K	CRI95 / CRI90	4083 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T940	Tunable White	33.4 W/m	2700K / 4000K	CRI95 / CRI90	4117 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T950	Tunable White	33.4 W/m	2700K / 5000K	CRI95 / CRI90	4136 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T957	Tunable White	33.4 W/m	2700K / 5700K	CRI95 / CRI90	4047 lm	121 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T965	Tunable White	33.4 W/m	2700K / 6500K	CRI95 / CRI90	4047 lm	121 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 027/T970	Tunable White	33.4 W/m	2700K / 7000K	CRI95 / CRI90	4047 lm	121 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 17 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 33W 027/T980	Tunable White	33.4 W/m	2700K / 8000K	CRI95 / CRI90	4047 lm	121 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/035	Tunable White	33.4 W/m	3000K / 3500K	CRI95	3287 lm	98 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/040	Tunable White	33.4 W/m	3000K / 4000K	CRI95	3308 lm	99 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T935	Tunable White	33.4 W/m	3000K / 3500K	CRI95 / CRI90	4118 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T940	Tunable White	33.4 W/m	3000K / 4000K	CRI95 / CRI90	4152 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T950	Tunable White	33.4 W/m	3000K / 5000K	CRI95 / CRI90	4171 lm	125 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T957	Tunable White	33.4 W/m	3000K / 5700K	CRI95 / CRI90	4082 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T965	Tunable White	33.4 W/m	3000K / 6500K	CRI95 / CRI90	4082 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T970	Tunable White	33.4 W/m	3000K / 7000K	CRI95 / CRI90	4082 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 030/T980	Tunable White	33.4 W/m	3000K / 8000K	CRI95 / CRI90	4082 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/040	Tunable White	33.4 W/m	3500K / 4000K	CRI95	3343 lm	100 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T940	Tunable White	33.4 W/m	3500K / 4000K	CRI95 / CRI90	4187 lm	125 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T950	Tunable White	33.4 W/m	3500K / 5000K	CRI95 / CRI90	4206 lm	126 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T957	Tunable White	33.4 W/m	3500K / 5700K	CRI95 / CRI90	4117 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T965	Tunable White	33.4 W/m	3500K / 6500K	CRI95 / CRI90	4117 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T970	Tunable White	33.4 W/m	3500K / 7000K	CRI95 / CRI90	4117 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 035/T980	Tunable White	33.4 W/m	3500K / 8000K	CRI95 / CRI90	4117 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 040/T950	Tunable White	33.4 W/m	4000K / 5000K	CRI95 / CRI90	4227 lm	127 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 040/T957	Tunable White	33.4 W/m	4000K / 5700K	CRI95 / CRI90	4138 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 040/T965	Tunable White	33.4 W/m	4000K / 6500K	CRI95 / CRI90	4138 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 040/T970	Tunable White	33.4 W/m	4000K / 7000K	CRI95 / CRI90	4138 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 040/T980	Tunable White	33.4 W/m	4000K / 8000K	CRI95 / CRI90	4138 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/027	Tunable White	33.4 W/m	1400K / 2700K	CRI90 / CRI95	2478 lm	74 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/030	Tunable White	33.4 W/m	1400K / 3000K	CRI90 / CRI95	2513 lm	75 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/035	Tunable White	33.4 W/m	1400K / 3500K	CRI90 / CRI95	2548 lm	76 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/040	Tunable White	33.4 W/m	1400K / 4000K	CRI90 / CRI95	2569 lm	77 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/916	Tunable White	33.4 W/m	1400K / 1600K	CRI90	1957 lm	59 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/918	Tunable White	33.4 W/m	1400K / 1800K	CRI90	2201 lm	66 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/920	Tunable White	33.4 W/m	1400K / 2000K	CRI90	2257 lm	68 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/922	Tunable White	33.4 W/m	1400K / 2200K	CRI90	2369 lm	71 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/925	Tunable White	33.4 W/m	1400K / 2500K	CRI90	2495 lm	75 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T927	Tunable White	33.4 W/m	1400K / 2700K	CRI90	3199 lm	96 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T930	Tunable White	33.4 W/m	1400K / 3000K	CRI90	3317 lm	99 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T935	Tunable White	33.4 W/m	1400K / 3500K	CRI90	3379 lm	101 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T940	Tunable White	33.4 W/m	1400K / 4000K	CRI90	3413 lm	102 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T950	Tunable White	33.4 W/m	1400K / 5000K	CRI90	3432 lm	103 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T957	Tunable White	33.4 W/m	1400K / 5700K	CRI90	3343 lm	100 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T965	Tunable White	33.4 W/m	1400K / 6500K	CRI90	3343 lm	100 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 18 OF
21

ARCHITAPE INDOOR LED TAPE SERIES

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 33W 914/T970	Tunable White	33.4 W/m	1400K / 7000K	CRI90	3343 lm	100 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 914/T980	Tunable White	33.4 W/m	1400K / 8000K	CRI90	3343 lm	100 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/027	Tunable White	33.4 W/m	1600K / 2700K	CRI90 / CRI95	2661 lm	80 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/030	Tunable White	33.4 W/m	1600K / 3000K	CRI90 / CRI95	2696 lm	81 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/035	Tunable White	33.4 W/m	1600K / 3500K	CRI90 / CRI95	2731 lm	82 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/040	Tunable White	33.4 W/m	1600K / 4000K	CRI90 / CRI95	2752 lm	82 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/918	Tunable White	33.4 W/m	1600K / 1800K	CRI90	2384 lm	71 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/920	Tunable White	33.4 W/m	1600K / 2000K	CRI90	2440 lm	73 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/922	Tunable White	33.4 W/m	1600K / 2200K	CRI90	2552 lm	76 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/925	Tunable White	33.4 W/m	1600K / 2500K	CRI90	2678 lm	80 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T927	Tunable White	33.4 W/m	1600K / 2700K	CRI90	3382 lm	101 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T930	Tunable White	33.4 W/m	1600K / 3000K	CRI90	3500 lm	105 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T935	Tunable White	33.4 W/m	1600K / 3500K	CRI90	3562 lm	107 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T940	Tunable White	33.4 W/m	1600K / 4000K	CRI90	3596 lm	108 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T950	Tunable White	33.4 W/m	1600K / 5000K	CRI90	3615 lm	108 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T957	Tunable White	33.4 W/m	1600K / 5700K	CRI90	3526 lm	106 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T965	Tunable White	33.4 W/m	1600K / 6500K	CRI90	3526 lm	106 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T970	Tunable White	33.4 W/m	1600K / 7000K	CRI90	3526 lm	106 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 916/T980	Tunable White	33.4 W/m	1600K / 8000K	CRI90	3526 lm	106 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/027	Tunable White	33.4 W/m	1800K / 2700K	CRI90 / CRI95	2905 lm	87 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/030	Tunable White	33.4 W/m	1800K / 3000K	CRI90 / CRI95	2940 lm	88 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/035	Tunable White	33.4 W/m	1800K / 3500K	CRI90 / CRI95	2975 lm	89 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/040	Tunable White	33.4 W/m	1800K / 4000K	CRI90 / CRI95	2996 lm	90 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/920	Tunable White	33.4 W/m	1800K / 2000K	CRI90	2684 lm	80 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/922	Tunable White	33.4 W/m	1800K / 2200K	CRI90	2796 lm	84 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/925	Tunable White	33.4 W/m	1800K / 2500K	CRI90	2922 lm	87 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T927	Tunable White	33.4 W/m	1800K / 2700K	CRI90	3626 lm	109 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T930	Tunable White	33.4 W/m	1800K / 3000K	CRI90	3744 lm	112 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T935	Tunable White	33.4 W/m	1800K / 3500K	CRI90	3806 lm	114 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T940	Tunable White	33.4 W/m	1800K / 4000K	CRI90	3840 lm	115 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T950	Tunable White	33.4 W/m	1800K / 5000K	CRI90	3859 lm	116 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T957	Tunable White	33.4 W/m	1800K / 5700K	CRI90	3770 lm	113 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T965	Tunable White	33.4 W/m	1800K / 6500K	CRI90	3770 lm	113 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T970	Tunable White	33.4 W/m	1800K / 7000K	CRI90	3770 lm	113 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 918/T980	Tunable White	33.4 W/m	1800K / 8000K	CRI90	3770 lm	113 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/027	Tunable White	33.4 W/m	2000K / 2700K	CRI90 / CRI95	2961 lm	89 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/030	Tunable White	33.4 W/m	2000K / 3000K	CRI90 / CRI95	2996 lm	90 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/035	Tunable White	33.4 W/m	2000K / 3500K	CRI90 / CRI95	3031 lm	91 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 19 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 33W 920/040	Tunable White	33.4 W/m	2000K / 4000K	CRI90 / CRI95	3052 lm	91 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/922	Tunable White	33.4 W/m	2000K / 2200K	CRI90	2852 lm	85 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/925	Tunable White	33.4 W/m	2000K / 2500K	CRI90	2978 lm	89 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T927	Tunable White	33.4 W/m	2000K / 2700K	CRI90	3682 lm	110 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T930	Tunable White	33.4 W/m	2000K / 3000K	CRI90	3800 lm	114 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T935	Tunable White	33.4 W/m	2000K / 3500K	CRI90	3862 lm	116 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T940	Tunable White	33.4 W/m	2000K / 4000K	CRI90	3896 lm	117 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T950	Tunable White	33.4 W/m	2000K / 5000K	CRI90	3915 lm	117 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T957	Tunable White	33.4 W/m	2000K / 5700K	CRI90	3826 lm	115 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T965	Tunable White	33.4 W/m	2000K / 6500K	CRI90	3826 lm	115 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T970	Tunable White	33.4 W/m	2000K / 7000K	CRI90	3826 lm	115 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 920/T980	Tunable White	33.4 W/m	2000K / 8000K	CRI90	3826 lm	115 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/027	Tunable White	33.4 W/m	2200K / 2700K	CRI90 / CRI95	3073 lm	92 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/030	Tunable White	33.4 W/m	2200K / 3000K	CRI90 / CRI95	3108 lm	93 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/035	Tunable White	33.4 W/m	2200K / 3500K	CRI90 / CRI95	3143 lm	94 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/040	Tunable White	33.4 W/m	2200K / 4000K	CRI90 / CRI95	3164 lm	95 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/925	Tunable White	33.4 W/m	2200K / 2500K	CRI90	3090 lm	93 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T927	Tunable White	33.4 W/m	2200K / 2700K	CRI90	3794 lm	114 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T930	Tunable White	33.4 W/m	2200K / 3000K	CRI90	3912 lm	117 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T935	Tunable White	33.4 W/m	2200K / 3500K	CRI90	3974 lm	119 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T940	Tunable White	33.4 W/m	2200K / 4000K	CRI90	4008 lm	120 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T950	Tunable White	33.4 W/m	2200K / 5000K	CRI90	4027 lm	121 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T957	Tunable White	33.4 W/m	2200K / 5700K	CRI90	3938 lm	118 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T965	Tunable White	33.4 W/m	2200K / 6500K	CRI90	3938 lm	118 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T970	Tunable White	33.4 W/m	2200K / 7000K	CRI90	3938 lm	118 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 922/T980	Tunable White	33.4 W/m	2200K / 8000K	CRI90	3938 lm	118 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/027	Tunable White	33.4 W/m	2500K / 2700K	CRI90 / CRI95	3199 lm	96 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/030	Tunable White	33.4 W/m	2500K / 3000K	CRI90 / CRI95	3234 lm	97 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/035	Tunable White	33.4 W/m	2500K / 3500K	CRI90 / CRI95	3269 lm	98 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/040	Tunable White	33.4 W/m	2500K / 4000K	CRI90 / CRI95	3290 lm	99 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T927	Tunable White	33.4 W/m	2500K / 2700K	CRI90	3920 lm	117 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T930	Tunable White	33.4 W/m	2500K / 3000K	CRI90	4038 lm	121 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T935	Tunable White	33.4 W/m	2500K / 3500K	CRI90	4100 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T940	Tunable White	33.4 W/m	2500K / 4000K	CRI90	4134 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T950	Tunable White	33.4 W/m	2500K / 5000K	CRI90	4153 lm	124 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T957	Tunable White	33.4 W/m	2500K / 5700K	CRI90	4064 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T965	Tunable White	33.4 W/m	2500K / 6500K	CRI90	4064 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W 925/T970	Tunable White	33.4 W/m	2500K / 7000K	CRI90	4064 lm	122 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL DIRECTORY

PAGE 20 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 33W 925/T980	Tunable White	33.4 W/m	2500K / 8000K	CRI90	4064 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/030	Tunable White	33.4 W/m	2700K / 3000K	CRI90 / CRI95	3938 lm	118 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/035	Tunable White	33.4 W/m	2700K / 3500K	CRI90 / CRI95	3973 lm	119 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/040	Tunable White	33.4 W/m	2700K / 4000K	CRI90 / CRI95	3994 lm	120 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T930	Tunable White	33.4 W/m	2700K / 3000K	CRI90	4742 lm	142 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T935	Tunable White	33.4 W/m	2700K / 3500K	CRI90	4804 lm	144 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T940	Tunable White	33.4 W/m	2700K / 4000K	CRI90	4838 lm	145 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T950	Tunable White	33.4 W/m	2700K / 5000K	CRI90	4857 lm	145 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T957	Tunable White	33.4 W/m	2700K / 5700K	CRI90	4768 lm	143 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T965	Tunable White	33.4 W/m	2700K / 6500K	CRI90	4768 lm	143 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T970	Tunable White	33.4 W/m	2700K / 7000K	CRI90	4768 lm	143 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T927/T980	Tunable White	33.4 W/m	2700K / 8000K	CRI90	4768 lm	143 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/035	Tunable White	33.4 W/m	3000K / 3500K	CRI90 / CRI95	4091 lm	122 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/040	Tunable White	33.4 W/m	3000K / 4000K	CRI90 / CRI95	4112 lm	123 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T935	Tunable White	33.4 W/m	3000K / 3500K	CRI90	4922 lm	147 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T940	Tunable White	33.4 W/m	3000K / 4000K	CRI90	4956 lm	148 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T950	Tunable White	33.4 W/m	3000K / 5000K	CRI90	4975 lm	149 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T957	Tunable White	33.4 W/m	3000K / 5700K	CRI90	4886 lm	146 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T965	Tunable White	33.4 W/m	3000K / 6500K	CRI90	4886 lm	146 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T970	Tunable White	33.4 W/m	3000K / 7000K	CRI90	4886 lm	146 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T930/T980	Tunable White	33.4 W/m	3000K / 8000K	CRI90	4886 lm	146 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/040	Tunable White	33.4 W/m	3500K / 4000K	CRI90 / CRI95	4174 lm	125 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T940	Tunable White	33.4 W/m	3500K / 4000K	CRI90	5018 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T950	Tunable White	33.4 W/m	3500K / 5000K	CRI90	5037 lm	151 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T957	Tunable White	33.4 W/m	3500K / 5700K	CRI90	4948 lm	148 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T965	Tunable White	33.4 W/m	3500K / 6500K	CRI90	4948 lm	148 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T970	Tunable White	33.4 W/m	3500K / 7000K	CRI90	4948 lm	148 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T935/T980	Tunable White	33.4 W/m	3500K / 8000K	CRI90	4948 lm	148 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T940/T950	Tunable White	33.4 W/m	4000K / 5000K	CRI90	5071 lm	152 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T940/T957	Tunable White	33.4 W/m	4000K / 5700K	CRI90	4982 lm	149 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T940/T965	Tunable White	33.4 W/m	4000K / 6500K	CRI90	4982 lm	149 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T940/T970	Tunable White	33.4 W/m	4000K / 7000K	CRI90	4982 lm	149 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T940/T980	Tunable White	33.4 W/m	4000K / 8000K	CRI90	4982 lm	149 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T950/T957	Tunable White	33.4 W/m	5000K / 5700K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T950/T965	Tunable White	33.4 W/m	5000K / 6500K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T950/T970	Tunable White	33.4 W/m	5000K / 7000K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T950/T980	Tunable White	33.4 W/m	5000K / 8000K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T957/T965	Tunable White	33.4 W/m	5700K / 6500K	CRI90	4912 lm	147 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE PRO 50 ARCHITECTURAL SERIES – COMPLETE MODEL
DIRECTORY

PAGE 21 OF
21

PART CODE	VARIANT	POWER	CCT / COLOUR	CRI	FLUX / OUTPUT	EFFICACY	CUTTING STEP	MAX RUN	DATASHEET
TW56/NN G5 33W T957/T970	Tunable White	33.4 W/m	5700K / 7000K	CRI90	4912 lm	147 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T957/T980	Tunable White	33.4 W/m	5700K / 8000K	CRI90	4912 lm	147 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T965/T970	Tunable White	33.4 W/m	6500K / 7000K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T965/T980	Tunable White	33.4 W/m	6500K / 8000K	CRI90	5001 lm	150 Lm/W	125 mm	3 m	PDF ↗
TW56/NN G5 33W T970/T980	Tunable White	33.4 W/m	7000K / 8000K	CRI90	4912 lm	147 Lm/W	125 mm	3 m	PDF ↗

ARCHITAPE INDOOR LED TAPE SERIES